EG-4200

ACCESS DOOR FOR EXPOSED GRID CEILINGS



The Acudor EG-4200 is a metal access door to be installed in Exposed Grid Ceilings. The EG-4200 provides easy access in T-bar suspended ceilings.

APPLICATION:


- For installation in Exposed Grid tile ceilings
- Allows for safe and convenient access

PRODUCT FEATURES:

- All aluminum construction ensures long life
- Quick and easy installation
- Flush and pleasant design

EG-4200 SPECIFICATIONS:

Material: 14GA Aluminum
Door: Flush to frame with rounded safety corners
Frame: One-piece formed for strength
Hinge: Exposed flush aluminum piano hinge
Latch: Stainless Steel screwdriver operated cam latch
Optional Latch: Allen head/spanner head cam latch
Finish: Baked white prime coat (additional finish paint is recommended for superior corrosion resistance).

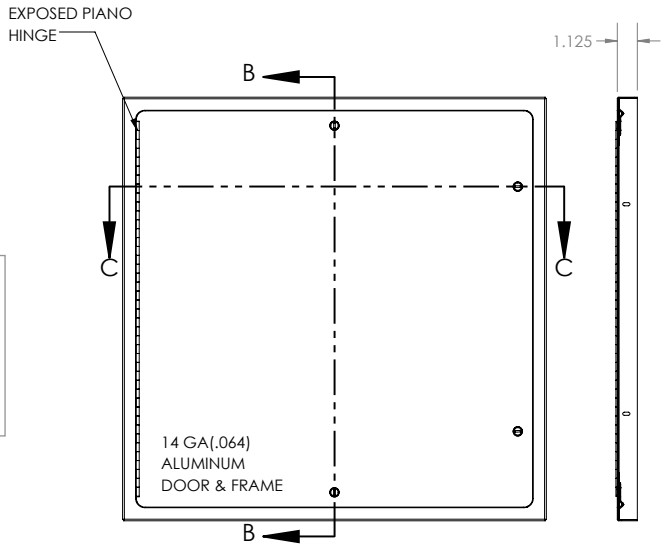

EG-4200 STANDARD SIZES:

Size (Inch/mm)	T-Bar Ceiling Opening (Inch/mm)	Weight (lbs/kg)
24 x 24 (609 x 609)	23.75 x 23.75 (603 x 603)	14 (6.4)
24 x 48 (609 x 1219)	23.75 x 47.75 (603 x 1213)	30 (13.6)

For detailed specifications, reference submittal sheet available at acudor.com

U.S.A.: info@acudor.com / 800.722.0501 • **CANADA:** info@acudor.ca / 844.228.3671
INTERNATIONAL: info@acudorintl.com / 905.428.2240 • **MEXICO:** infomx@acudor.com / +52 844 171 6595
India / Middle East / North Africa: ap-imea@acudor.com / +971-4-399-6966 • **OFFICIAL SITE: www.acudor.com**

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or part) without proper authorization. Copyright © 2024