

www.acudor.com
U.S.A.: info@acudor.com / 800.722.0501
CANADA: info@acudor.ca / 844.228.3671
INTERNATIONAL: info@acudorintl.com
(905) 428.2240


ACF-2064-DW


FLUSH ACOUSTICAL ACCESS DOOR FOR DRYWALL

QTY	NOMINAL SIZE	A	B	C	D	E	F	LOCK QTY
	12 X 12 (305mm X 305mm)	11.567 (294mm)	11.818 (300mm)	14.484 (368mm)	14.484 (368mm)	12.044 (306mm)	12.044 (306mm)	1
	16 X 16 (406mm X 406mm)	15.567 (395mm)	15.818 (402mm)	18.484 (469mm)	18.484 (469mm)	16.044 (408mm)	16.044 (408mm)	1
	18 X 18 (457mm X 457mm)	17.567 (446mm)	17.818 (453mm)	20.484 (520mm)	20.484 (520mm)	18.044 (458mm)	18.044 (458mm)	1
	24 X 24 (610mm X 610mm)	23.567 (599mm)	23.818 (605mm)	26.484 (673mm)	26.484 (673mm)	24.044 (611mm)	24.044 (611mm)	1
	24 X 36 (610mm X 914mm)	23.567 (599mm)	35.818 (910mm)	26.484 (673mm)	38.484 (977mm)	24.044 (611mm)	36.044 (915mm)	2

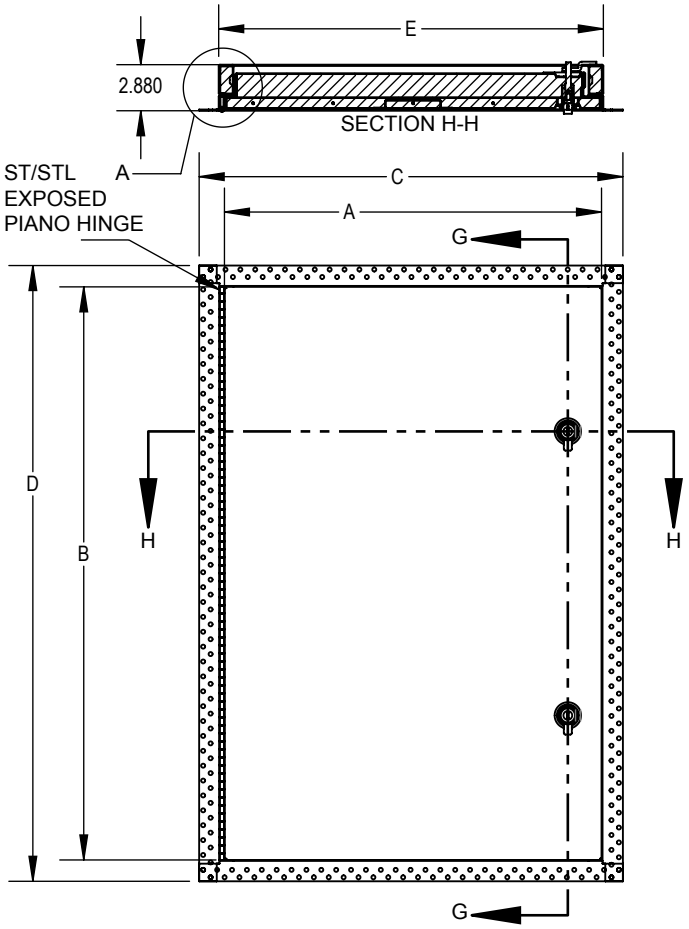

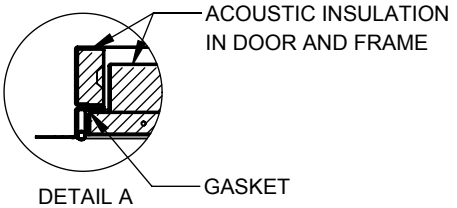

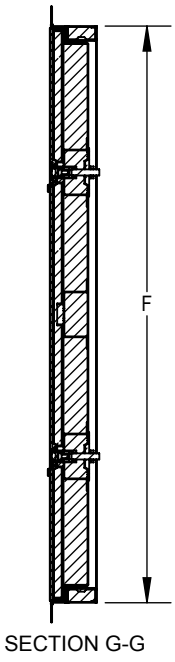

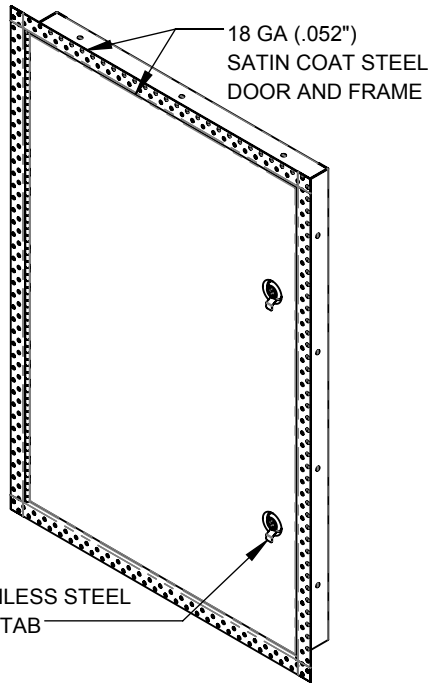

STANDARD FEATURES:
18GA (.052) SATIN COAT STEEL, BAKED WHITE PRIME COAT (ADDITIONAL FINISH PAINT IS RECOMMENDED FOR SUPERIOR CORROSION RESISTANCE)
1/8" X 1/2" NEOPRENE GASKET WITH RUBBER ADHESIVE
SLOTTED COMPRESSION LATCH

<u>ACOUSTIC RATING:</u>
TESTED AND EVALUATED TO
ASTM: E90(09), ASTM: E413(16), ASTM: E1332(16)
CERTIFIED TO STC RATING 64 AND OITC RATING 54

OPTIONS:
MATERIAL: ☐ STAINLESS STEEL FINISH:
LOCK OPTIONS:

☐ HEX ☐ HEX WITH SECURITY PIN ☐ SQUARE ☐ TRIANGLE ☐ CYLINDER LOCK & KEY

JOB NAME: APPROVED BY:

CUSTOMER: DATE:

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.