ACUDOR


(Address 1) 9 Woodland Road, Unit A. Roseland, NJ 07068
(Address 2) 4216 N. Pecos Rd, Ste. 104 Las Vegas, NV 89115
Tel: 800-722-0501 Fax: (973)575-5160
www.acudor.com email: info@acudor.com


SVA-CS FOR COLD STORAGE FACILITIES

QTY	OPENING WIDTH "W"	OPENING LENGTH "L"	QTY	OPENING WIDTH "W"	OPENING LENGTH "L"
	60" (1524mm)	60" (1524mm)			
	60" (1524mm)	72" (1829mm)			
	60" (1524mm)	90" (2286mm)			
	60" (1524mm)	96" (2438mm)			

SPECIFICATIONS:

- Fully Welded & Assembled Curb 14/18 GA G90 Steel or Aluminum
- Base options include self flashing, curb mount and metal building
- 6" Rigid Insulation R39 with thermally broken system
- Full perimeter double sets of EPDM bulb gaskets with thermal breaks
- Lids open against a 10 PSF live load
- Hinges and latches 12 GA galvanized steel
- Latches rated for 90 PSF uplift
- UL listed fusible or McCabe resetable links
- Inside and outside manual releases
- High performance gas springs with hold open

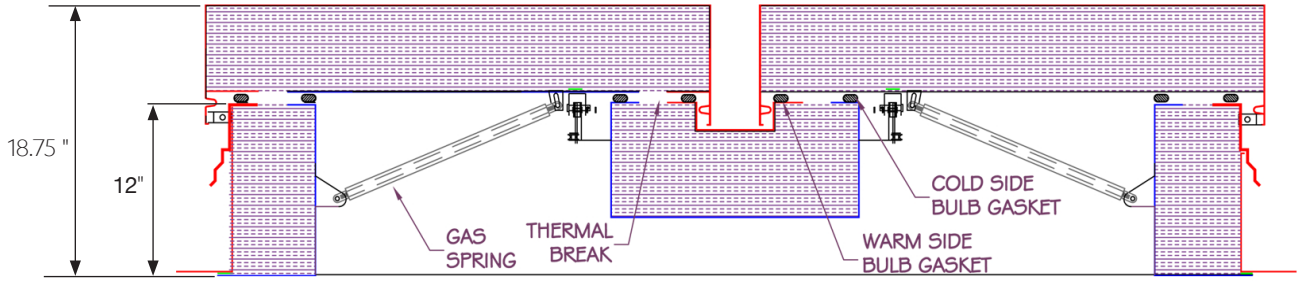

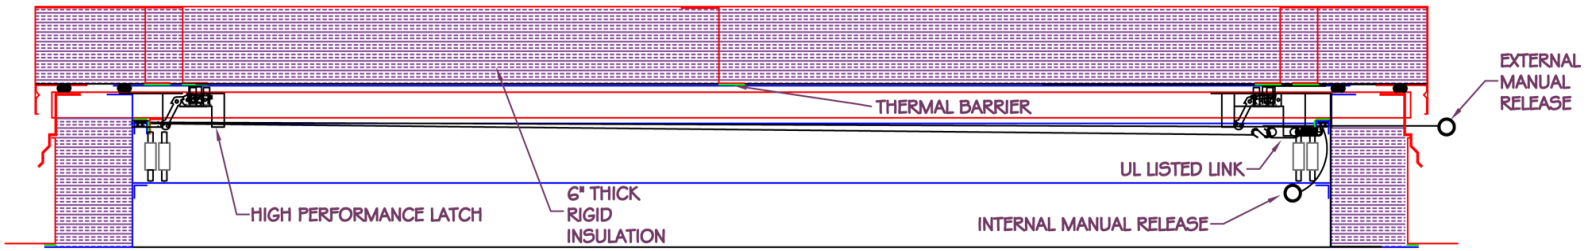

JOB NAME: APPROVED BY:

CUSTOMER: DATE:

COPYRIGHT © 2015 ACUDOR ACCESS DOORS AND ACUDOR PRODUCTS INC. ALL RIGHTS RESERVED