RECESSED ACCESS DOOR FOR EXTERIOR CEILINGS

GFRC-RH

GLASS FIBER REINFORCED CEMENT RADIUS CORNER - HINGED



Application

Glass fiber reinforced cement, ceiling access doors are designed to blend seamlessly into exterior soffits/ceilings. The hinged feature allows this door to be installed in walls.

Product Features

- Portland Cement, Fiber, Post Consumer Recycled Glass
- European Angle Hinges
- Tapered edge for joint tape
- Easily textured
- Lightweight
- No cracking or shrinkage
- Mold and moisture resistant

GFRC-RH Access Door Specifications:


- Shell Thickness = .125" .375"
- Fastener Test Pull Out (wood stud) = 525 lb. avg.
- Fastener Test Pull Out (metal stud) = 525 lb. avg.
- Fastener Push Through Test = 350 lb. avg.
- Fuel Contribution (ASTM-E84-80) = 0
- Flame Spread (ASTM-E84-80) = 0
- Smoke Index (ASTM-E84-80) = 0
- Combustion (ASTM-E84-80) = 0

GFRC-RH STANDARD SIZES

(other sizes available upon request)

Door Size	Ceiling Opening	Weight
Inches (mm)	Inches (mm)	LBS (kg)
9 x 9 (229 x 229)	15 x 15 (381 x 381)	6.0 (2.73)
12 x 12 (305 x 305)	18 x 18 (457 x 457)	9.0 (4.09)
16 x 16 (406 x 406)	22 x 22 (559 x 559)	10.0 (4.53)
18 x 18 (457 x 457)	24 x 24 (610 x 610)	11.0 (5.0)
24 x 24 (610 x 610)	30 x 30 (762 x 762)	16.0 (7.27)

For detailed specifications see submittal sheet

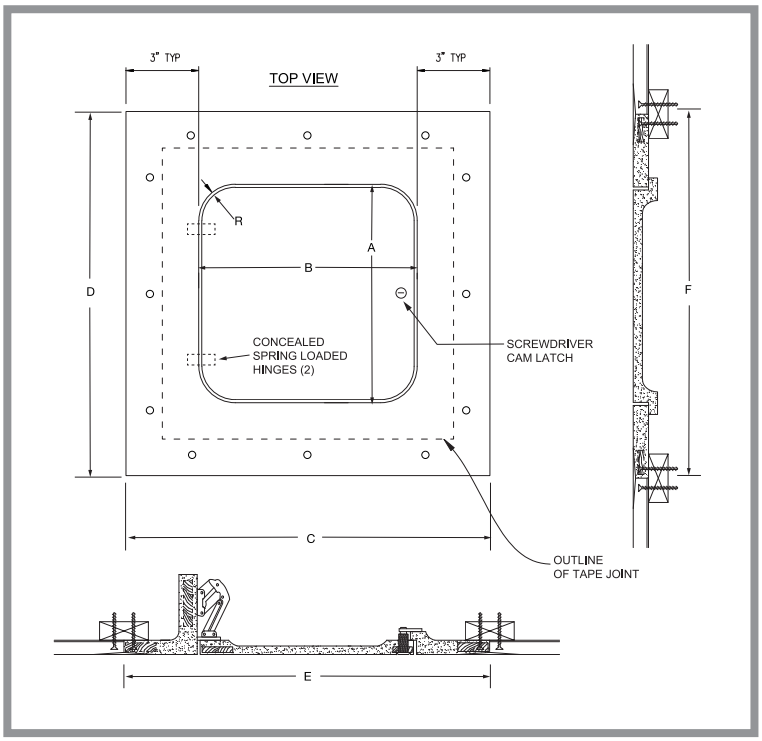

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.