SF-2000

Surface Mounted Access Door



Application

- An innovative surface mounted access door for all types of walls and ceilings.

Product Features

- An exposed continuous piano hinge allows the door panel to open to 175 degrees
- There is no frame to extend into the wall or ceiling
- Perfect for access to odd size openings

SF-2000 Access Door Specifications:

Door / Door Frame: Steel: 16 gauge, flush to frame. With rounded safety corners and a one piece outer flange. Frame is one piece outer flange.

Hinge: Exposed continuous piano hinge

Standard Latch: Stainless Steel Slotted Screwdriver Cam Latch

Optional Latches/Locks: Cylinder lock & key, allen head cam latch, spanner head cam latch.


Finish: Baked White Prime Coat
(Additional finish paint is recommended for superior corrosion resistance)

SF-2000 STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs.	kg.
8 X 8	203 X 203	1.0	2.0	0.9
12 X 12	305 X 305	1.0	3.9	1.8
16 X 16	406 X 406	2.0	6.3	2.9
24 X 24	610 X 610	4.0	12.7	5.8

Wall opening is normal door size minus - 1/4" (6 mm)
For detailed specifications see submittal sheet

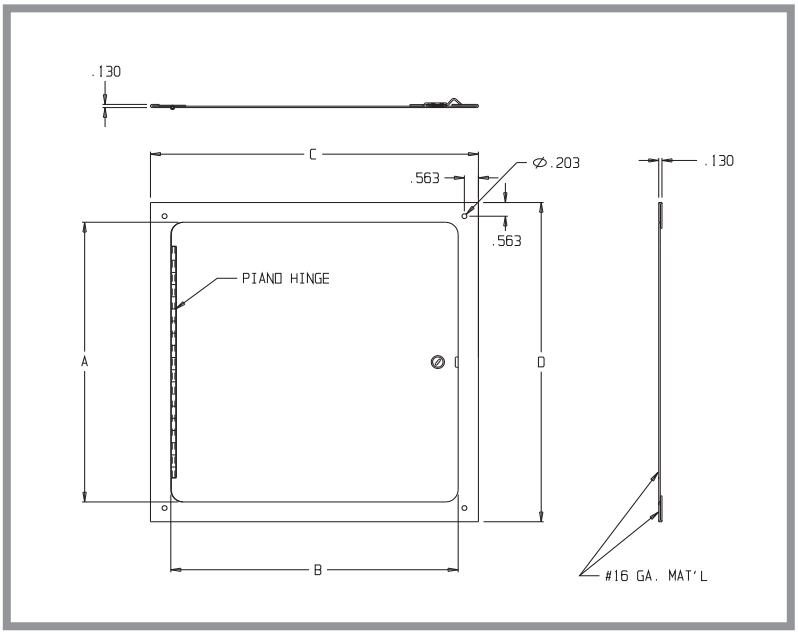

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.