AS-9000-DW

SPECIALTY DOORS

Gasketed Drywall Access Door



Application

- Designed to provide a gasketed fit in all types of walls and ceilings
- This door is commonly used in clean rooms, laboratories, operating rooms, etc.

Product Features

- Gasketed access door
- Formed door panel with reinforced edges and a concealed hinge, along with open cell gasket between the door and frame
- Drywall taping bead flange

AS-9000-DW Access Door Specifications:

Door / Door Frame: Stainless Steel or Steel: 18 gauge door, 18 gauge mounting frame, flange to be drywall taping bead flange
Hinge: Concealed
Gasket: Pemko S88 adhesive-backed bulb silicone gasket
Standard Latch: Stainless Steel Slotted Screwdriver Cam Latch
Optional Latches/Locks: Cylinder lock & key, allen head cam latch, spanner head cam latch, torx head with security pin
Finish: Baked White Prime Coat
(Additional finish paint is recommended for superior corrosion resistance)


Please note the AS-9000 has not been tested for air penetration
For a door that has been tested for Air & Water penetration see ADWT model.

AS-9000 -DW STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Weight per Door	
Inches	mm	lbs.	kg.
8 X 8	203 X 203	4.0	1.8
12 X 12	305 X 305	5.0	2.3
16 X 16	406 X 406	7.5	3.4
18 X 18	457 X 457	8.8	4.0
24 X 24	610 X 610	13.9	6.3
24 X 36	610 X 914	20.5	9.3

Wall or ceiling opening is nominal door size + 3/8" (9 mm)
For detailed specifications see submittal sheet

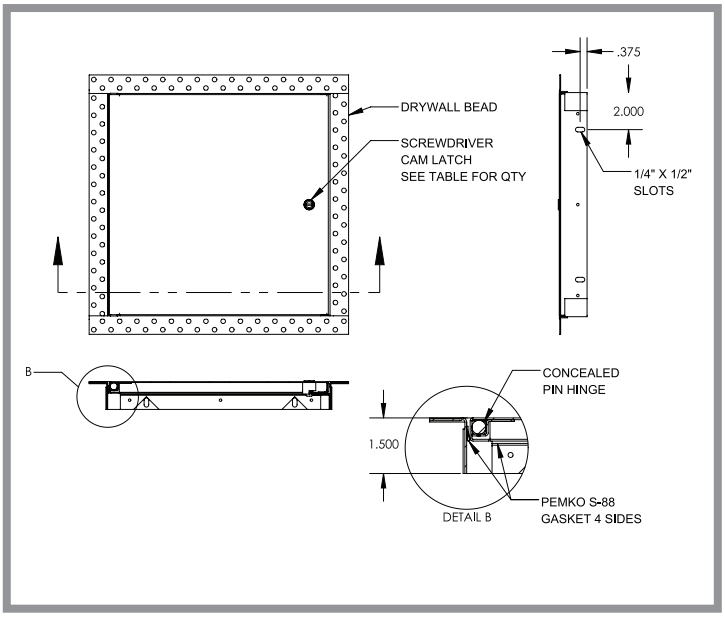

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.