PS-5030

FLUSH ACCESS DOOR

for plaster walls and ceilings



Application

- Installation in plaster walls and ceilings, before the plaster is applied

Product Features

- An expansion casing bead with 3" wide galvanized lath
- Concealed continuous hinge

PS-5030 Door Specifications:

Material: Door / Door Frame: 14 gauge.

Mounting Frame: Formed door panel, flanged on four sides, flush to edge of frame expansion casing bead with 3" wide galvanized lath, recessed 3/4" to receive plaster.

Hinge: Continuous, concealed.

Standard Latch: Stainless Steel Slotted Screwdriver Cam Latch.

Optional Latches/Locks: Cylinder lock & key, allen head cam latch, spanner head cam latch, torx.


Finish: Baked White Prime Coat.
(Additional finish paint is recommended for superior corrosion resistance).

PS-5030 STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs.	kg.
8 X 8	203 X 203	1.0	2.3	1.0
10 X 10	254 X 254	1.0	4.3	2.0
12 X 12	305 X 305	1.0	6.3	2.9
14 X 14	355 X 355	1.0	6.5	2.9
16 X 16	406 X 406	2.0	10.1	4.6
18 X 18	457 X 457	2.0	12.1	5.5
22 X 22	560 X 560	4.0	16.4	7.4
24 X 24	610 X 610	4.0	19.4	8.8
24 X 36	610 X 914	5.0	37.2	16.9

Wall or ceiling opening is nominal door size + 3/8" (9 mm)
For detailed specifications see submittal sheet

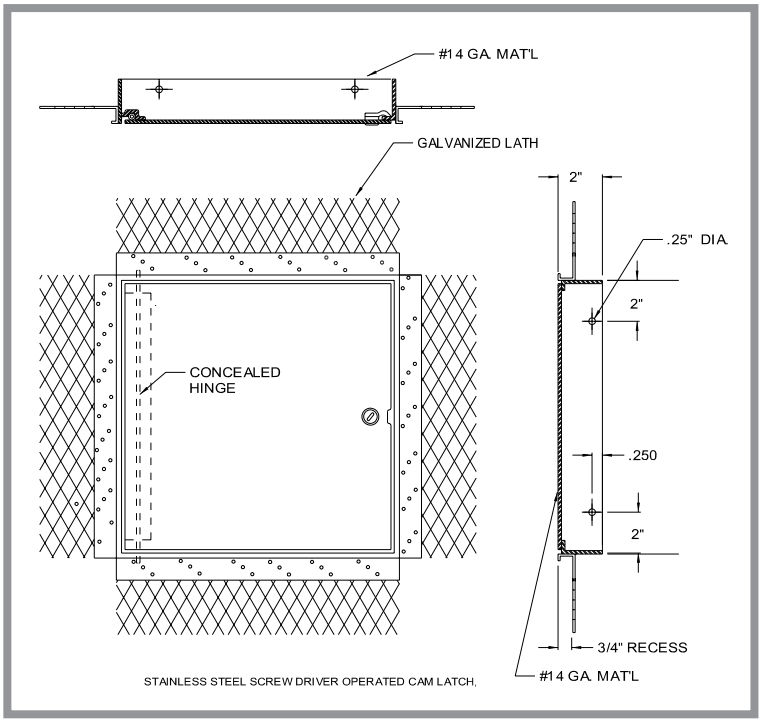

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.