www.acudor.com
U.S.A.: info@acudor.com / 800.722.0501
CANADA: info@acudor.ca / 844.228.3671
INTERNATIONAL: info@acudorintl.com
(905) 428.2240


# FW-5050-ACF


## ACOUSTICAL FIRE RATED DOOR

| QTY | NOMINAL SIZE | A | B | C | D | E | F | LOCK |
|---|---|---|---|---|---|---|---|---|
| | 8 X 8 (203 X 203) | 7.78 (198) | 7.78 (198) | 10.00 (254) | 10.00 (254) | 8.12 (206) | 8.12 (206) | 1 |
| | 10 X 10 (254 X 254) | 9.78 (248) | 9.78 (248) | 12.00 (305) | 12.00 (305) | 10.12 (257) | 10.12 (257) | 1 |
| | 12 X 12 (305 X 305) | 11.78 (299) | 11.78 (299) | 14.00 (356) | 14.00 (356) | 12.12 (308) | 12.12 (308) | 1 |
| | 14 X 14 (356 X 356) | 13.78 (350) | 13.78 (350) | 16.00 (406) | 16.00 (406) | 14.12 (359) | 14.12 (359) | 1 |
| | 16 X 16 (406 X 406) | 15.78 (401) | 15.78 (401) | 18.00 (457) | 18.00 (457) | 16.12 (409) | 16.12 (409) | 1 |
| | 18 X 18 (457 X 457) | 17.78 (452) | 17.78 (452) | 20.00 (508) | 20.00 (508) | 18.12 (460) | 18.12 (460) | 1 |
| | 24 X 24 (610 X 610) | 23.78 (604) | 23.78 (604) | 26.00 (660) | 26.00 (660) | 24.12 (613) | 24.12 (613) | 1 |
| | | | | | | | | |

FOR WALLS THIS DOOR HAS A 'UL' AND 'ULC', 1 1/2 HOUR 'B' LABEL, WITH A MAXIMUM TEMPERATURE OF 250° C (482° F) DEGREES AFTER 30 MINUTES.
UL 10B; CAN/ ULC S104; NFPA 80
ASTM E413 STC29 and ASTM E1332 OITC24


**FOR VERTICAL INSTALLATION ONLY**

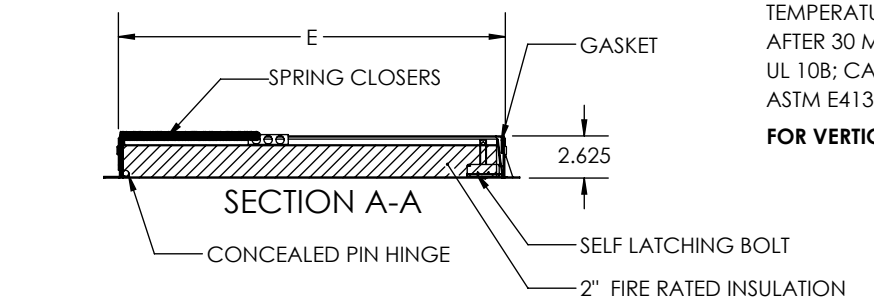

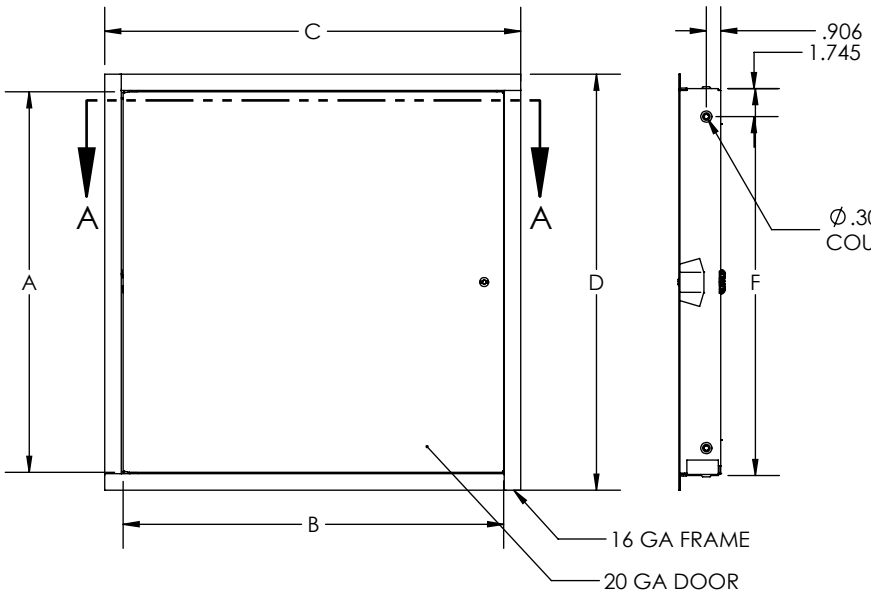

KNURLED KNOB


FLUSH KEY

Warnock Hersey

**STC 29**
**OITC 24**

STANDARD FEATURES: UNIVERSAL SELF LATCHING BOLT - OPERATED BY KNURLED KNOB / FLUSH KEY WITH INSIDE TURN RELEASE.
CARBON STEEL, PRIME COAT BAKED ENAMEL FINISH

OPTIONS:

| LOCK TYPE | MATERIAL | FINISH |
|---|---|---|
| ☐ RIM CYLINDER LOCK | ☐ STAINLESS STEEL | ☐ #4 SATIN POLISH |
| ☐ MORTISE CYLINDER LOCK | ☐ OTHER | ☐ OTHER |

### ALL FIRE RATED:

SPECIAL SIZES CAN BE ORDERED, BUT BASIC CONSTRUCTION MUST REMAIN CONSTANT TO COMPLY WITH UL AND ULC REGULATIONS.

JOB NAME: APPROVED BY:

CUSTOMER: DATE:

*This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.*

www.acudor.com
U.S.A.: info@acudor.com / 800.722.0501
CANADA: info@acudor.ca / 844.228.3671
INTERNATIONAL: info@acudorintl.com
(905) 428.2240


# FW-5050-ACF


## ACOUSTICAL FIRE RATED DOOR

| QTY | NOMINAL SIZE | A | B | C | D | E | F | LOCK |
|---|---|---|---|---|---|---|---|---|
| | 22 X 30 (559 X 762) | 29.78 (756) | 21.78 (553) | 24 (610) | 32 (813) | 22.12 (562) | 30.12 (765) | 2 |
| | 22 X 36 (556 X 914) | 35.78 (909) | 21.78 (553) | 24 (610) | 38 (965) | 22.12 (562) | 36.12 (917) | 2 |
| | 24 X 36 (610 X 914) | 35.78 (909) | 23.78 (604) | 26 (660) | 38 (965) | 24.12 (613) | 36.12 (917) | 2 |
| | 24 X 79 (610 X 2006) | 78.78 (2001) | 23.78 (604) | 26 (600) | 81 (2057) | 24.12 (613) | 79.12 (2010) | 3 |
| | | | | | | | | |

FOR WALLS THIS DOOR HAS A 'UL' AND 'ULC', 1 1/2 HOUR 'B' LABEL, WITH A MAXIMUM TEMPERATURE OF 250° C (482° F) DEGREES AFTER 30 MINUTES.
UL 10B; CAN/ ULC S104; NFPA 80
ASTM E413 STC29 and ASTM E1332 OITC24


**FOR VERTICAL INSTALLATION ONLY**

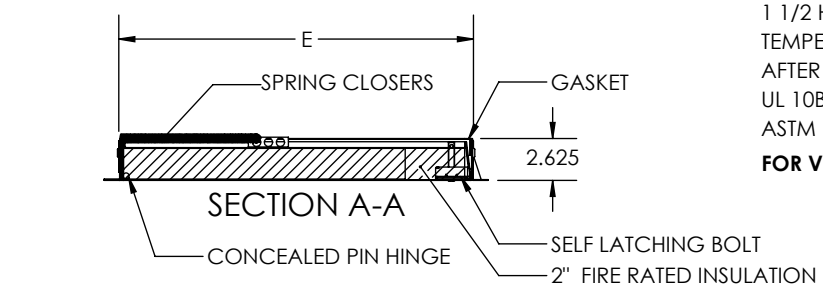

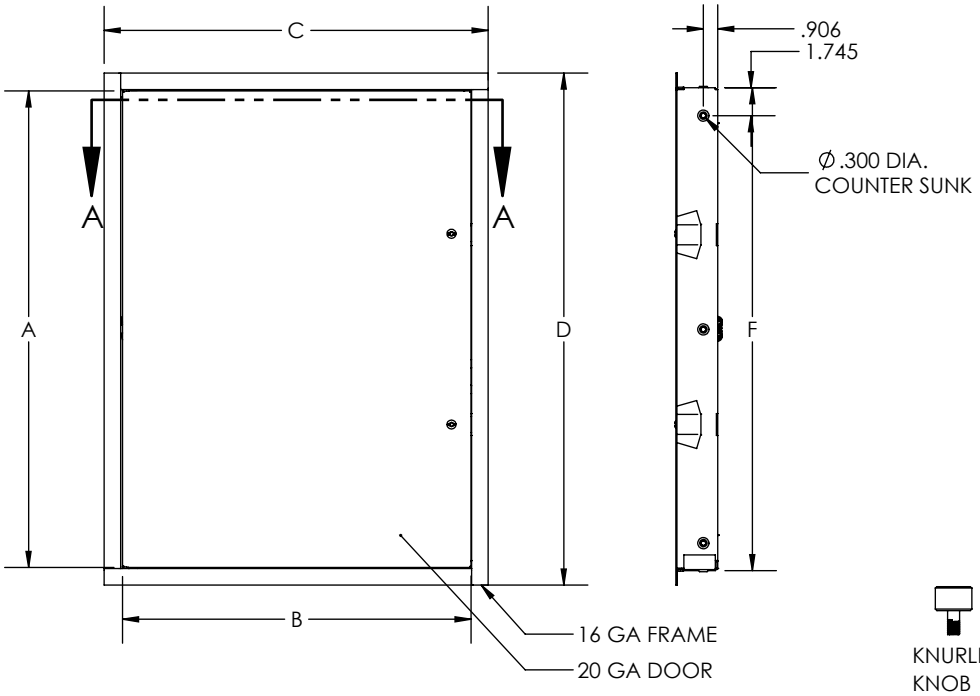
Warnock Hersey

**STC 29**
**OITC 24**




STANDARD FEATURES: UNIVERSAL SELF LATCHING BOLT - OPERATED BY KNURLED KNOB / FLUSH KEY WITH INSIDE TURN RELEASE.
CARBON STEEL, PRIME COAT BAKED ENAMEL FINISH

OPTIONS:

| LOCK TYPE | MATERIAL | FINISH |
|---|---|---|
| ☐ RIM CYLINDER LOCK | ☐ STAINLESS STEEL | ☐ #4 SATIN POLISH |
| ☐ MORTISE CYLINDER LOCK | ☐ OTHER | ☐ OTHER |

### ALL FIRE RATED:

SPECIAL SIZES CAN BE ORDERED, BUT BASIC CONSTRUCTION MUST REMAIN CONSTANT TO COMPLY WITH UL AND ULC REGULATIONS.

JOB NAME: APPROVED BY:

CUSTOMER: DATE:


*This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.*

www.acudor.com
U.S.A.: info@acudor.com / 800.722.0501
CANADA: info@acudor.ca / 844.228.3671
INTERNATIONAL: info@acudorintl.com
(905) 428.2240


# FW-5050-ACF


## ACOUSTICAL FIRE RATED DOOR

| QTY | NOMINAL SIZE | A | B | C | D | E | F | LOCK |
|---|---|---|---|---|---|---|---|---|
| | 24 x 48 (610 X 1219) | 47.78 (1214) | 23.61 (600) | 26.00 (660) | 50.00 (1270) | 24.12 (613) | 48.12 (1222) | 2 |
| | | | | | | | | |
| | | | | | | | | |

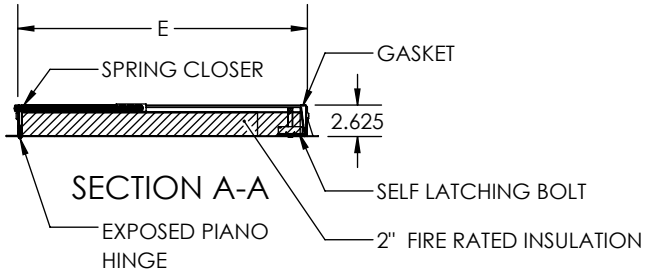


FOR WALLS THIS DOOR HAS A 'UL' AND 'ULC', 1 1/2 HOUR 'B' LABEL, WITH A MAXIMUM TEMPERATURE OF 250° C (482° F) DEGREES AFTER 30 MINUTES.
UL 10B; CAN/ ULC S104; NFPA 80
ASTM E413 STC29 and ASTM E1332 OITC24
**FOR VERTICAL INSTALLATION ONLY**

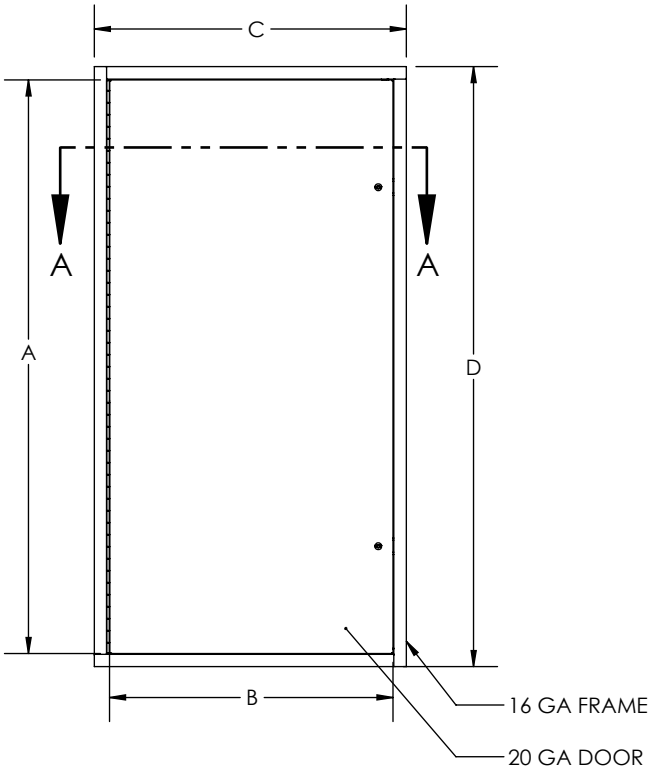

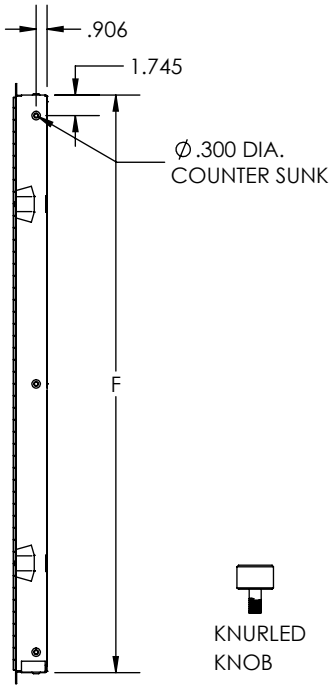
Warnock Hersey

**STC 29**
**OITC 24**




STANDARD FEATURES: UNIVERSAL SELF LATCHING BOLT - OPERATED BY KNURLED KNOB / FLUSH KEY WITH INSIDE TURN RELEASE.
CARBON STEEL, PRIME COAT BAKED ENAMEL FINISH

OPTIONS:

| LOCK TYPE | MATERIAL | FINISH |
|---|---|---|
| ☐ RIM CYLINDER LOCK | ☐ STAINLESS STEEL | ☐ #4 SATIN POLISH |
| ☐ MORTISE CYLINDER LOCK | ☐ OTHER | ☐ OTHER |

### ALL FIRE RATED:

SPECIAL SIZES CAN BE ORDERED, BUT BASIC CONSTRUCTION MUST REMAIN CONSTANT TO COMPLY WITH UL AND ULC REGULATIONS.

JOB NAME: APPROVED BY:

CUSTOMER: DATE:

*This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.*