DW-5058

Recessed Access door for 5/8" drywall,
Drywall Panel Door



FOR WALL INSTALLATION, HINGE SHOULD BE LOCATED AT BOTTOM

Application

- Designed to provide access in walls and ceilings, while maintaining an invisible, architecturally pleasing appearance

Product Features

- Designed for installation in 5/8" drywall
- Aluminum Extrusion Door & Frame
- Powder Painted
- Dust seal gasket
- Concealed Touch latch

DW-5058 Door Specifications:

Material: Aluminum extrusion with drywall fitted in door panel.

Door Frame: Aluminum extrusion 6063-T6 recessed to provide similar edge to drywall bead to allow for finishing of wall or ceiling surface.

Hinge: Wing hinge allows door panel to open to 90 degrees, and also allows for door panel to be removed from frame. Safety chain installed on door & frame for safety.

Gasket: Dust seal gasket.

Standard Latch: Concealed Touch Latches.

Optional Latches/Locks: Slotted Screwdriver Cam Latch, allen head cam latch, spanner head cam latch, cylinder lock & key.


Finish: Baked White Prime Coat.
(Additional finish paint is recommended for superior corrosion resistance).

DW-5058 STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Weight per Door	
Inches	mm	lbs.	kg.
8 x 8	203 x 203	1.5	0.7
12 x 12	305 x 305	2.0	0.9
16 x 16	406 x 406	5.0	2.3
18 x 18	457 x 457	6.0	2.7
24 x 24	610 x 610	12.0	5.5
24 x 36	610 x 914	21.0	9.5

Wall opening is normal door size plus +3/8" (9.5mm)
For detailed specifications see submittal sheet

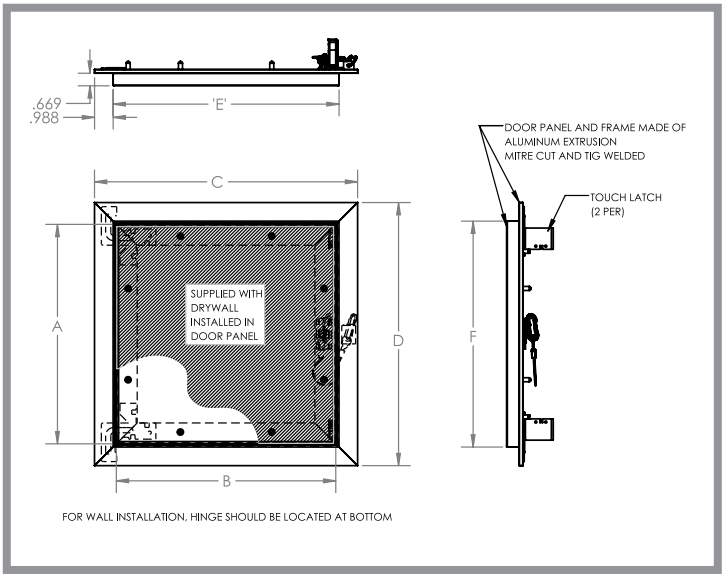

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.