
GFRG-SH-TL

GLASS FIBER REINFORCED GYPSUM SQUARE CORNER - HINGED WITH TOUCH LATCH

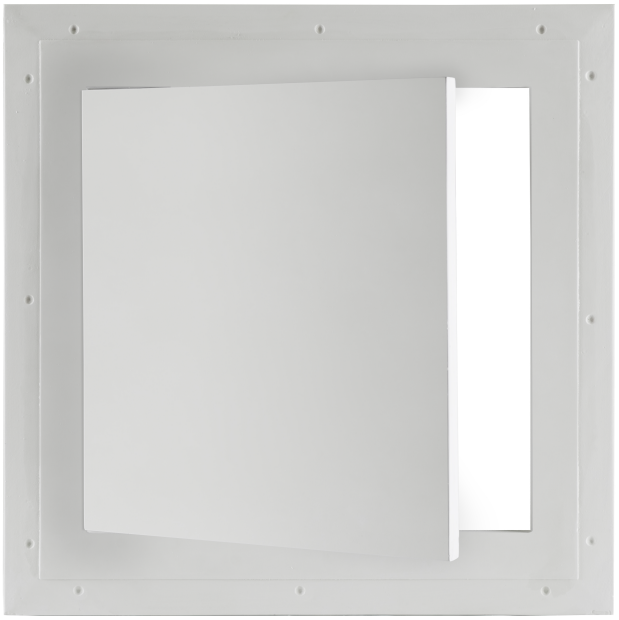

Application

Glass fiber reinforced gypsum, ceiling access doors are designed to blend seamlessly into drywall ceilings. The hinged feature allows this door to be installed in walls.

Product Features

- Concealed Touch Latches
- European Angle Hinges
- Tapered edge for joint tape
- Easily textured
- Lightweight
- No cracking or shrinkage
- Mold and moisture resistant


GFRG-SH-TL Access Door Specifications:

- Shell Thickness = .125" .375"
- Fastener Test Pull Out (wood stud) = 525 lb. avg.
- Fastener Test Pull Out (metal stud) = 525 lb. avg.
- Fastener Push Through Test = 350 lb. avg.
- Fuel Contribution (ASTM-E84-80) = 0
- Flame Spread (ASTM-E84-80) = 0
- Smoke Index (ASTM-E84-80) = 0
- Combustion (ASTM-E84-80) = 0

GFRG-SH-TL STANDARD SIZES

(Special sizes available upon request)

Door Size	Ceiling Openning	Weight
Inches (mm)	**Inches (mm)**	**LBS (kg)**
9 x 9 (229 x 229)	15 x 15 (381 x 381)	8.4 (3.8)
12 x 12 (305 x 305)	18 x 18 (457 x 457)	11.2 (5.1)
16 x 16 (406 x 406)	22 x 22 (559 x 559)	12 (5.4)
18 x 18 (457 x 457)	24 x 24 (610 x 610)	16.6 (7.5)
24 x 24 (610 x 610)	30 x 30 (762 x 762)	22.7 (10.3)

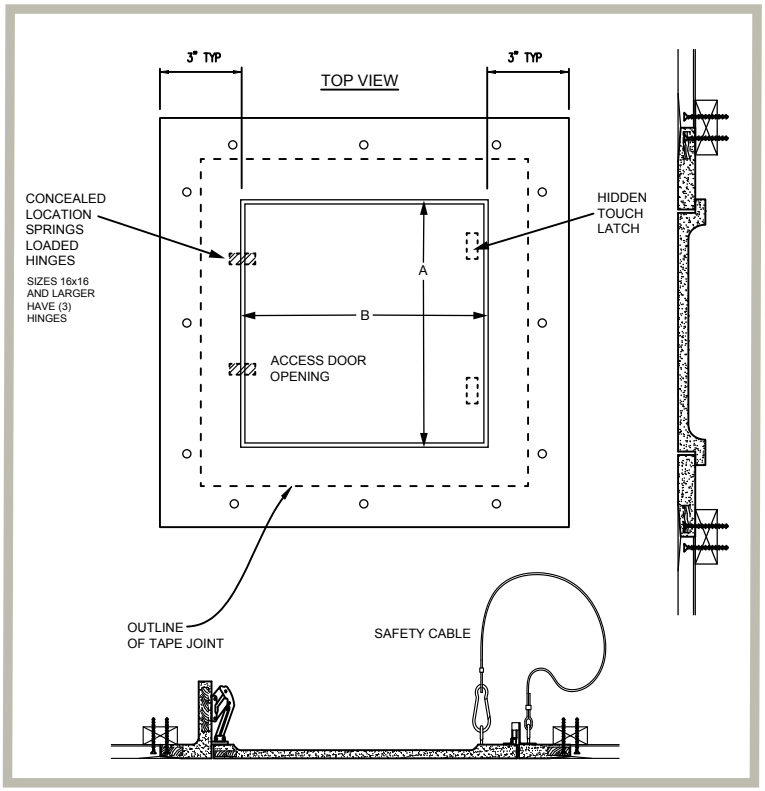

For detailed specifications see submittal sheet available at www.acudor.com

U.S.A.: info@acudor.com / 800.722.0501 **CANADA:** info@acudor.ca / 844.228.3671 **INTERNATIONAL:** info@acudorintl.com / 905.428.2240
MEXICO: infomx@acudor.com / +52 844 171 6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.