AL-9500

SPECIALTY DOORS

Anti Ligature Access Door



Application

- Designed for Anti-Ligature Installation
- Designed to provide a fully gasketed fit in all types of walls and ceilings
- This door is commonly used in prisons, correctional facilities, psychiatric Hospitals, etc.

Product Features

- Fully gasketed access door
- Formed door panel with reinforced edges and a concealed hinge, along with closed cell gasket between the door and frame
- Fully welded frame flange, radiused corners

AL-9500 Access Door Specifications:

Door / Door Frame: Steel: 14 gauge door, 14 gauge mounting frame, flange to be 1" wide. Also available: Stainless Steel.


Hinge: Concealed.

Gasket: Pemko S88 adhesive-backed bulb silicone gasket.

Standard Latch: Tamper-proof spanner head cam latch.

Optional Latches/Locks: Torx head, Cylinder Lock, Mortise Lock, Torx head with security pin.

Finish: Baked White Prime Coat.
(Additional finish paint is recommended for superior corrosion resistance)

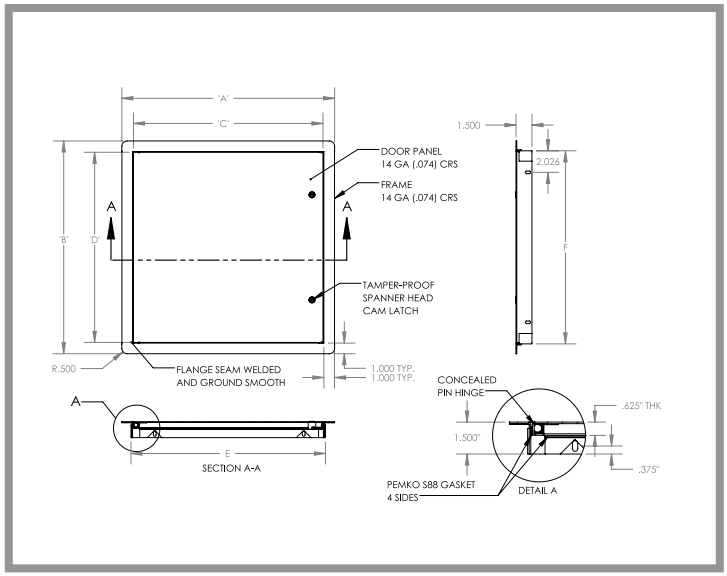

AL-9500 STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Weight per Door	
Inches	mm	lbs.	kg.
12 X 12	305 X 305	9.0	4.1
16 X 16	406 X 406	10.0	4.5
18 X 18	457 X 457	13.0	5.9
24 X 24	609 X 609	20.0	9.1
24 X 36	609 X 914	31.0	14.1

Wall or ceiling opening is nominal door size + 3/8" (9 mm)
For detailed specifications see submittal sheet

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.