
ACUDOR
www.acudor.com
U.S.A.: info@acudor.com / 800.722.0501
CANADA: info@acudor.ca / 844.228.3671
INTERNATIONAL: info@acudorintl.com
(905) 428 2240

# GDD

## GREASE DUCT ACCESS DOOR

| QTY | MODEL NO. | PANEL OUTSIDE DIMENSION | | PANEL HEIGHT | STUD HEIGHT | HOLE SIZE Inches (mm) | | MTG STUDS (NUTS) |
|---|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | F | |
| | FGGD0707 | 10" (254mm) | 10" (254mm) | .5" (13mm) | 1" (25mm) | 7" (178mm) | 7" (178mm) | 4 |
| | FGGD0712 | 10" (254mm) | 15" (381mm) | .5" (13mm) | 1" (25mm) | 7" (178mm) | 12" (305mm) | 6 |
| | FGGD0720 | 10" (254mm) | 23" (584mm) | .5" (13mm) | 1" (25mm) | 7" (178mm) | 20" (508mm) | 10 |
| | FGGD1212 | 15" (381mm) | 15" (381mm) | .5" (13mm) | 1" (25mm) | 12" (305mm) | 12" (305mm) | 8 |
| | FGGD1220 | 15" (381mm) | 23" (584mm) | .5" (13mm) | 1" (25mm) | 12" (305mm) | 20" (508mm) | 14 |
| | FGGD1620 | 19" (483mm) | 23" (584mm) | .5" (13mm) | 1" (25mm) | 16" (406mm) | 20" (508mm) | 16 |
| | FGGD2020 | 23" (584mm) | 23" (584mm) | .5" (13mm) | 1" (25mm) | 20" (508mm) | 20" (508mm) | 16 |

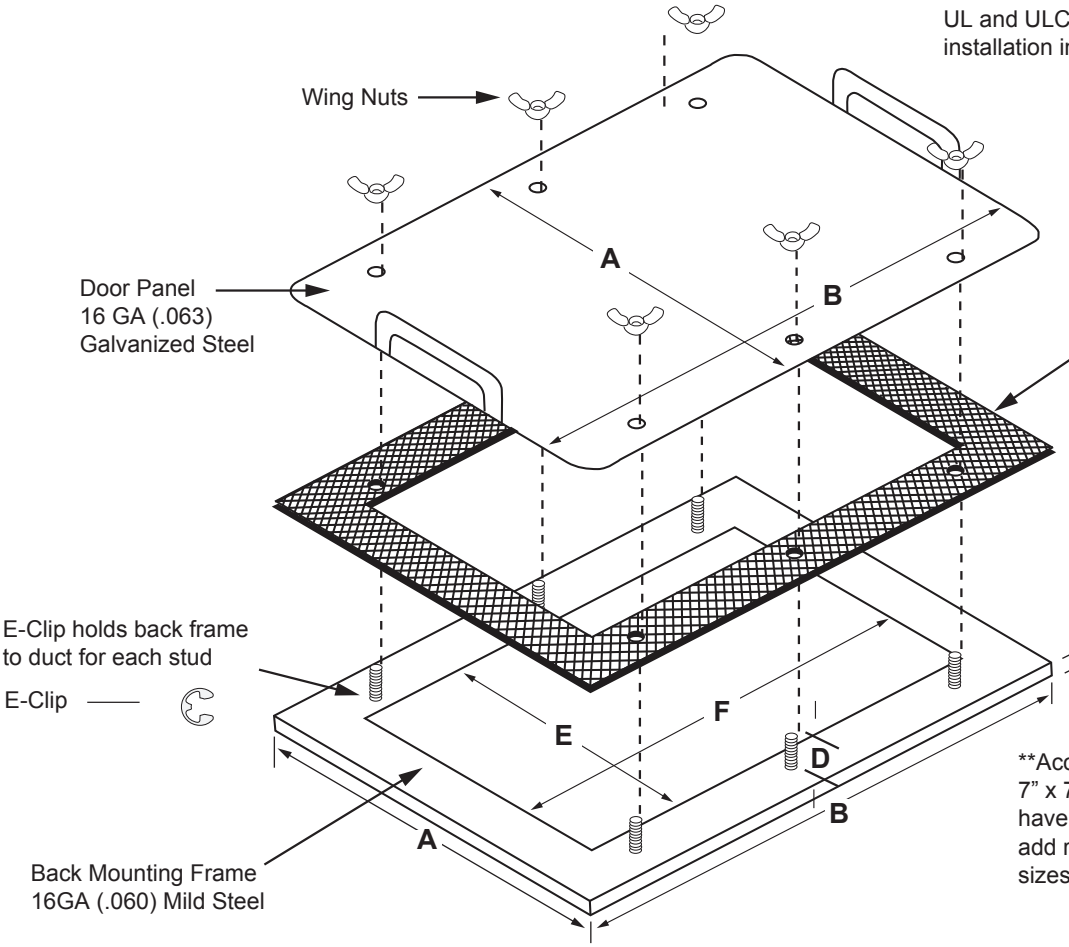


UL and ULC listed access door for installation into kitchen exhaust system

c UL us
LISTED
3RS9
File No. MH19744
NFPA #96
UL1978

Gasket Rated to 2300ºF (1260ºC) for Fire Tight Seal

**NOTE:** Gasket is High Temp bonded to the front panel

**Access Panels over 7" x 7" (178mm x 178mm) have a 1/2" 13mm) turndown to add rigidity to the panel. Smaller sizes do not have a turndown.

**STANDARD FEATURES:**
REMOVABLE DOOR PANEL WITH HIGH TEMPERATURE RESISTANT GASKET, GALVANIZED STEEL MILL FINISH, MOUNTING FRAME WITH STUDS AND WINGNUTS, MILD STEEL MILL FINISH

JOB NAME:

CUSTOMER:

APPROVED BY:

DATE:

v1.22.26

*This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.*