UF-5500

UNIVERSAL FLUSH



Application

- Installation in Drywall, Plaster, Masonry, Tile or any flush surface

Product Features

- Drawn flanged door panel with rounded corners
- Concealed hinge and welds
- Galvanized steel material with white baked on polyester powder coat

UF-5500 Access Door Specifications:

Material: 12" x 12" and smaller are 20 gauge galvanized steel door & frame. Over 15" x 15" and larger are 18 gauge galvanized steel door & frame.

Door: Flush To Frame-Drawn flanged door panel with rounded corners.

Door Frame: Drawn one piece trim flange and mounting frame.

Hinge: Concealed.

Standard Latch: Slotted Screwdriver Cam Latch.


Optional Latches/Locks: Cylinder lock and key; allen spanner or torx head cam latch, torx head with security pin.

Finish: Baked White Prime Coat.
(Additional finish paint is recommended for superior corrosion resistance).

UF-5500 STANDARD SIZES

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs	kg
6 X 6	152 X 152	1	1.3	0.59
8 X 8	203 X 203	1	1.8	0.82
12 X 12	305 X 305	1	3.3	1.50
15 X 15	381 X 381	1	5.3	2.40
18 X 18	457 X 457	1	7.0	3.18
24 X 24	610 X 610	2	11.8	5.35

Wall or ceiling opening is W +3/8" (9mm)
For detailed specifications see submittal sheet

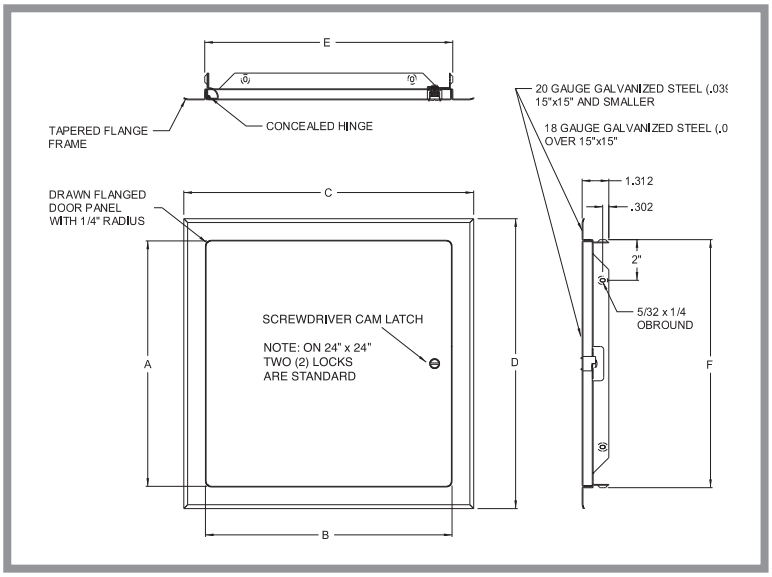

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.