
HDSS-6020

Self Stick Duct Doors, *for Sheet Metal Duct*

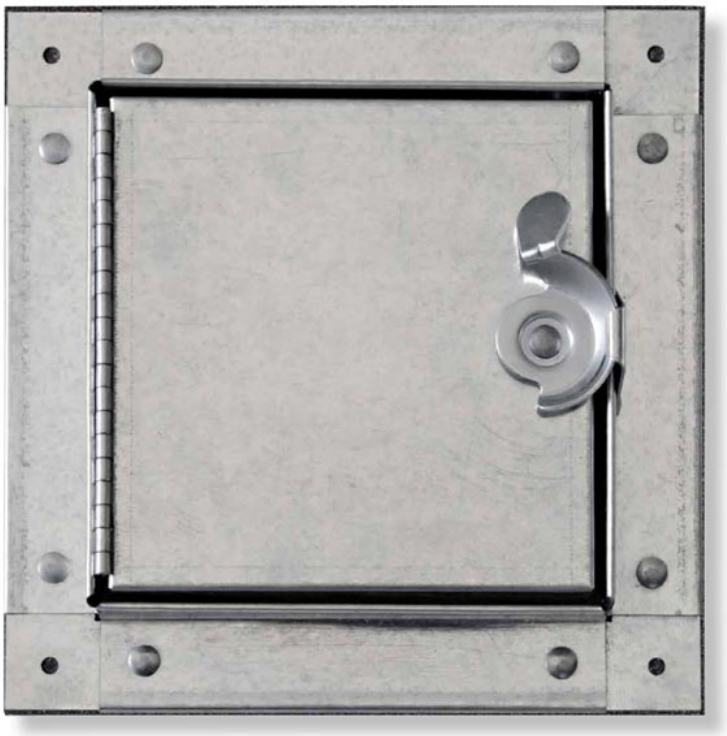

Application

- Provides easy access to sheet metal ducts

Product Features


- Innovative self stick frame for easy installation.
- Insulated door panel, single cam, hinged.
- Tested to 10" SP with minimal leakage.

Options

- Aluminum
- Stainless steel
- Cylinder lock & key
- Hasp + staple
- L handle

HDSS-6020 Duct Access Door Specifications:

Door: 24 gauge galvanized steel, double panel.
Frame: 24 gauge galvanized steel.
Hinge: Continuous aluminum piano hinge.
Insulation: Door panel filled with 1" fiberglass insulation.
Gasketing: 1/8" thick by 1/2" wide closed cell neoprene gasketing between door and frame. 1/8" thick by 11/2" wide adhesive bonded gasket between frame to duct.
Latch: Self tightening, hand operated cam latches.
Hardware: Hex head sheet metal screws.

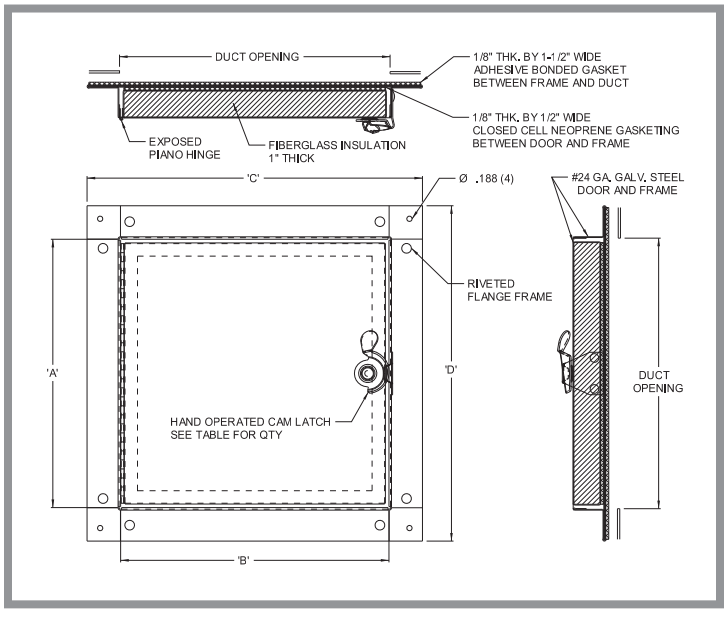

HDSS-6020 STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H				Weight per Door	
Inches	mm	Duct Opening	Latches	lbs.	kg.
6 X 6	152 X 152	4.5 X 4.5	2	1.50	0.7
8 X 8	203 X 203	6.5 X 6.5	2	2.20	1.0
10 X 10	254 X 254	8.5 X 8.5	2	3.00	1.4
12 X 12	305 X 305	10.5 X 10.5	2	3.80	1.7
14 X 14	356 X 356	12.5 X 12.5	4	4.90	2.2
16 X 16	406 X 406	14.5 X 14.5	4	6.00	2.7
18 X 18	457 X 457	16.5 X 16.5	4	7.00	3.2
20 X 20	508 X 508	18.5 X 18.5	4	9.10	4.1
24 X 24	610 X 610	22.5 X 22.5	4	11.60	5.3

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.