HD-5070-F

DUCT DOORS
for Ductboard/Fiberglass ducts




Application
- Economical access to fiberglass ducts

Product Features
- These doors are for use in low to medium pressure fiberglass ducts
- Hinged door panel

Options
- Aluminum, stainless steel

HD-5070-F "Hinged" Fiberglass Doors Specifications:
Material: Galvanized steel.
Door: 24 gauge.
Mounting Frame: 24 gauge.
Gasketing: 1/8" thick by 1/2" wide closed cell neoprene gasketing between door and frame and also between frame and duct.
Insulation: 1" Micro-AIRC M/F TYPE-475 R value 7.7.
Hinge: Continuous aluminum piano hinge.
Latch: Self tightening, hand operated cam latch.
Optional Latches/Locks: Cylinder Lock & Key, Hasp + staple, L-Handle.

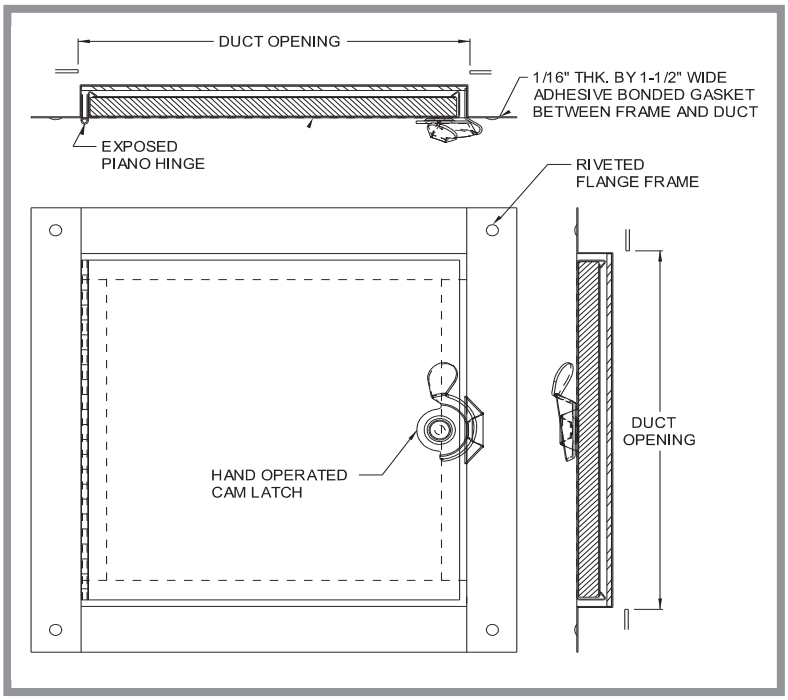

HD-5070-F STANDARD SIZES
(other sizes available upon request)

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs.	kg.
6 X 6	152 X 152	1	1.00	0.5
8 X 8	203 X 203	1	1.25	0.6
10 X 10	254 X 254	1	2.00	0.9
12 X 12	304 X 304	1	2.50	1.1
14 X 14	356 X 356	2	3.25	1.5
16 X 16	406 X 406	2	4.00	1.8
18 X 18	457 X 457	2	5.50	2.5
20 x 20	508 x 508	2	9.00	4.1
24 X 24	610 X 610	2	12.00	5.4

Duct opening is same size as normal door opening
For detailed specifications see submittal sheet

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.