CD-5080-F

DUCT DOOR
for Fiberglass Ducts



Application
- Economical access to fiberglass ducts

Product Features
- These doors are for use in low to medium pressure fiberglass ducts
- Double cam - no hinge, removable door panel


Options
- Aluminum, stainless steel

CD-5080-F Duct Access Door Specifications:
Material: Galvanized steel
Door: 24 gauge
Mounting Frame: 24 gauge
Gasketing: 1/8" thick by 1/2" wide closed cell neoprene gasketing between door and frame. 1/16" thick by 11/2" adhesive bonded gasket between frame to duct
Insulation: 2" of Fiberglass Insulation Compressed to 1" 7.7R Value
Latch: Self tightening, hand operated cam latch.

CD-5080-F STANDARD SIZES
(other sizes available upon request)

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs.	kg.
6 x 6	152 x 152	2	1.00	0.5
8 x 8	203 x 203	2	1.25	0.6
10 x 10	254 x 254	2	2.00	0.9
12 x 12	304 x 304	2	2.50	1.1
14 x 14	356 x 356	4	3.25	1.5
16 x 16	406 x 406	4	4.00	1.8
18 x 18	457 x 457	4	5.50	2.5
20 x 20	508 x 508	4	9.00	4.1
24 x 24	610 x 610	4	12.00	5.4

Duct opening is same size as normal door opening
For detailed specifications see submittal sheet

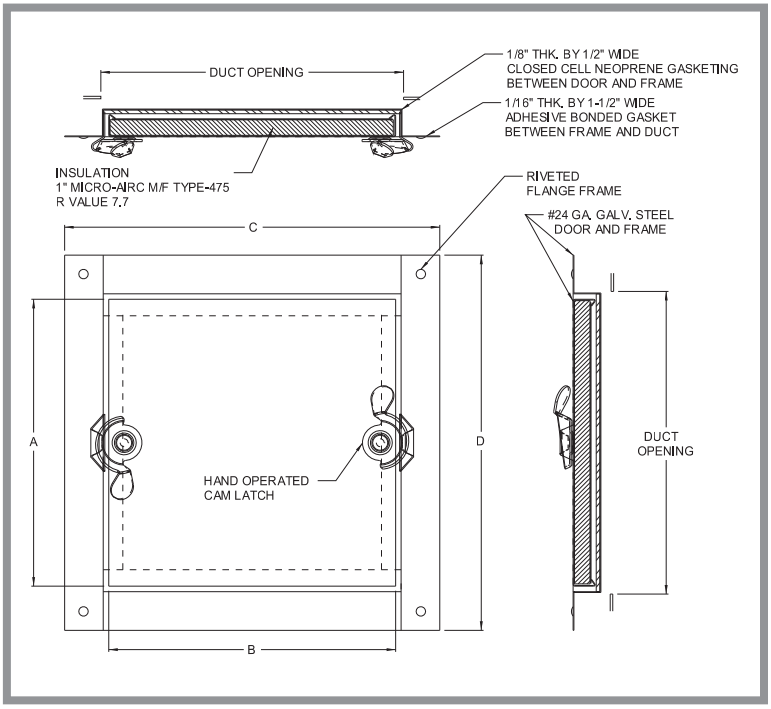

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.