FB-5060-TD

Fire Rated Uninsulated
Recessed for Tile Walls



Application
- Designed for use in tiled walls
- Used whenever it is necessary to provide access in fire rated walls, when temperature rise **is not** a factor

Product Features
- Recessed ½" and is lined with self-furring lath
- Designed to maintain continuity in a 2-hour fire barrier wall

FB-5060-TD Access Door Specifications:
Material: Steel.

Door: 16 gauge with reinforced edges, door pane recessed 1/2" and lined with self-furring lath.

Mounting Frame: 16 gauge steel.

Hinge: Continuous exposed piano hinge.

Fire Rating (Walls): UL — 1-1/2 hour "B" label. ULC — 2 hour "B" label. (optional) Max size 36 x 48.


Standard Latch: Universal self-latching bolt, operated by a flush key. When master keying is required, doors can be prepared for rim or mortise cylinder locks.

Finish: Baked White Prime Coat
(Additional finish paint is recommended for superior corrosion resistance)

FB-5060-TD STANDARD SIZES
(other sizes available upon request)

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs.	kg.
12 X 12	305 X 305	1	9.0	4.1
16 X 16	406 X 406	1	13.0	5.9
18 X 18	457 X 457	1	15.0	6.8
24 X 24	610 X 610	1	24.0	10.9
24 X 36	610 X 914	2	33.0	15.0

Wall opening is nominal door size + 3/8" (9 mm)
For detailed specifications see submittal sheet

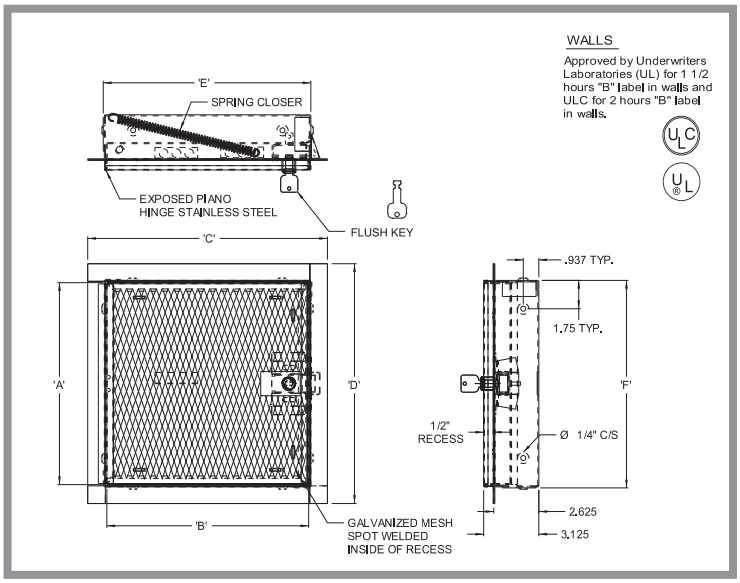

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.