HD-5070

Duct Door
for Sheet Metal Duct



Application
- Assures a tight seal without obstruction in the air system

Product Features
- Insulated door panel, along with the gasketing between the door and frame
- 5/8" notched knock over tabs on the inside of the frame provide for easy installation
- These doors are designed for use in LOW to medium pressure up to 3" static W.G.


Options
- Aluminum, stainless steel, cylinder lock & key, HASP + staple, L-handle

HD-5070 Duct Access Door Specifications:
Material: Galvanized steel,double panel.
Door: 24 gauge.
Mounting Frame: 24 gauge with 5/8" notched knock over tabs.
Gasketing: 1/8" thick by 1/2" wide closed cell neoprene gasketing between door and frame and also between frame and duct.
Hinge: Continuous aluminum piano hinge.
Insulation: Door panel filled with 2" fiberglass insulation (7.7 R factor), compressed into 1".

HD-5070 STANDARD SIZES
(other sizes available upon request)

Nominal Door Size W&H		Duct Opening	Weight per Door	
Inches	mm		lbs.	kg.
6 X 6	152 X 152	4.75" X 4.75"	1.10	0.5
8 X 8	203 X 203	6.75" X 6.75"	1.70	0.8
10 X 10	254 X 254	8.75" X 8.75"	2.40	1.1
12 X 12	304 X 304	10.75" X 10.75"	3.25	1.5
14 X 14	356 X 356	12.75" X 12.75"	4.20	1.9
16 X 16	406 X 406	14.75" X 14.75"	5.10	2.3
18 X 18	457 X 457	16.75" X 16.75"	6.40	2.9
20 X 20	508 X 508	18.75" X 18.75"	7.80	3.5
24 X 24	610 X 610	22.75" X 22.75"	10.60	4.8

Duct opening is normal door size minus -1 1/4" (31mm)
For detailed specifications see submittal sheet

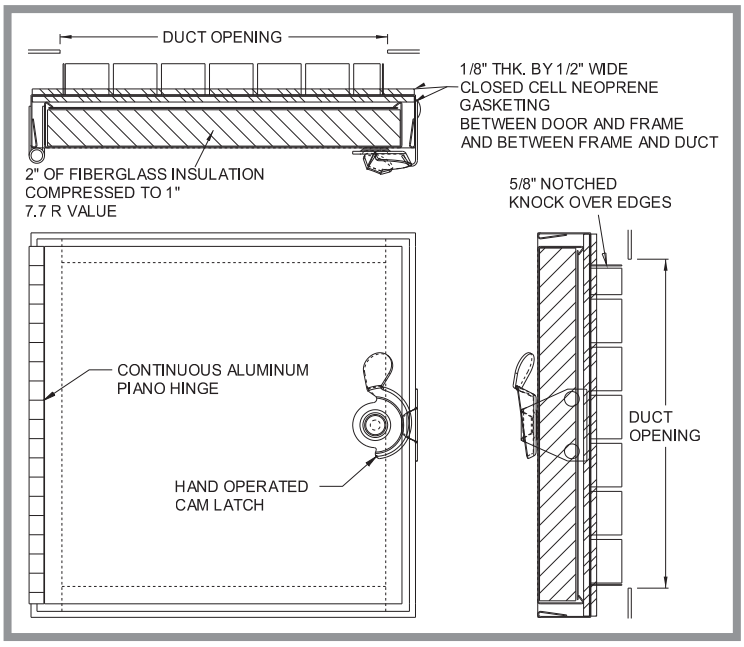

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.