ACD-2064

SPECIALTY DOORS

Recessed Acoustical Access Door for Drywall

Highest STC & OITC Rating in the INDUSTRY



Application

This recessed access door is ideal for use on Acoustical drywall walls and ceilings where maintaining STC (Sound Transmission Class) and OITC (Outdoor-Indoor Transmission Class) is required. The unique taping bead flange allows for a concealed finish.

Product Features

- Zinc coated steel provides superior corrosion resistance
- Drywall taping bead flange
- Recessed door fitted with 5/8" thick drywall, ensures finish similar to surrounding
- Tested and evaluated to ASTM: E90(09), ASTM: E413(16), ASTM: E1332(16) and certified to STC Rating 64 and OITC Rating 53

ACD-2064 Door Specifications:

Material: 18 Gauge Satin Coat Steel

Door: 18 Gauge recessed design filled with 1½" thick acoustic mineral liner, 0.11" thick mineral filled vinyl barrier and fitted with 5/8" thick drywall as finished face.

Frame: 18 Gauge, press bent for strength and rigidity, drywall taping bead flange Insulated with 1" thick acoustical mineral liner.

Gasket: 1/8" x ½" Neoprene Rubber with Adhesive

Hinge: Continuous exposed stainless steel piano hinge

Standard Lock: Slotted Compression Latch


Optional Lock: Compression Latch with Hex Head, Hex with security pin, Square, Triangle, Torx head with security pin, Cylinder Lock & Key

Acoustic Rating: This door has been tested and evaluated to ASTM: E90(09), ASTM: E413(16), ASTM: E1332(16) and certified to STC Rating 64 and OITC Rating 53

Finish: Satin Coat Steel

ACD-2064 STANDARD SIZES

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs.	kg.
12 x 12	305 x 305	1	14.0	6.4
16 x 16	400 x 400	1	22.0	10.0
18 x 18	457 x 457	1	25.0	11.3
24 x 24	610 x 610	1	38.0	17.2
24 x 36	610 x 914	2	60.0	27.2

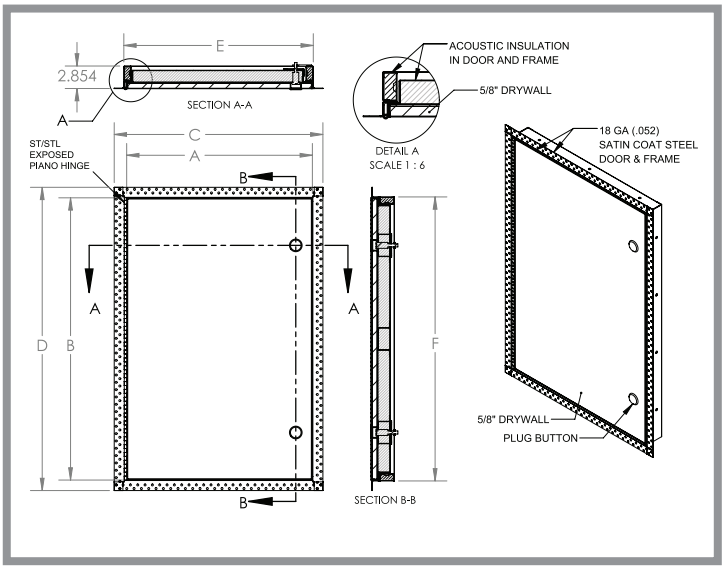

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.