RHG GALVANIZED
LADDER ACCESS ROOF HATCH



Application
Acudor Ladder Access Roof Hatches are designed to provide convenient, economical access to the roof of a building.

Features RHG
- Weather tight construction
- 12" high insulated curb
- G90 Galv. Steel
- Convenient one-hand operation
- Supports 40lbs./sq. ft. live load
- Stainless Steel Hardware

Optional Features RHG
- Stainless Steel cover, curb
- Louvered Curbs
- Curb pitch corrected for sloped roof
- Higher curb heights for "green roof" applications
- Polycarbonate domes for daylighting
- Curb Mounted Units

RHG Specifications:
Cover: Double-skin construction ("in box type design") with 1" Polyiso (R-6) insulation and a continuous EPDM foam weather/draft seal gasket that is attached to the inside of cover to provide a flush, tight fit. Designed to support a live load of 40lbs.sq.ft., the cover is 14 gauge galvanized steel with a 22 gauge galvanized steel inside liner.


Curb: 14 gauge galvanized steel with 1" thick Polyiso (R-6) insulation with Fiberglass liner at curb exterior. Curb is 12" high, with 3.375" wide bottom flange and pre-drilled mounting holes.

Hinge: Heavy duty galvanized steel pintle hinges with 3/8" SS pin.

Opening: Gas spring operators allow cover to open and close with ease.Stainless Steel inside pull handle allows for easy control when closing cover.

Door Latch: Self latching, zinc plated outside T handle with stainless steel inside lock and lever assembly. Unit also has inside and outside padlock provisions.

Finish: Material is prepared with an iron phosphate wash, followed by a rust inhibiting primer, and then a baked on polyester enamel paint.

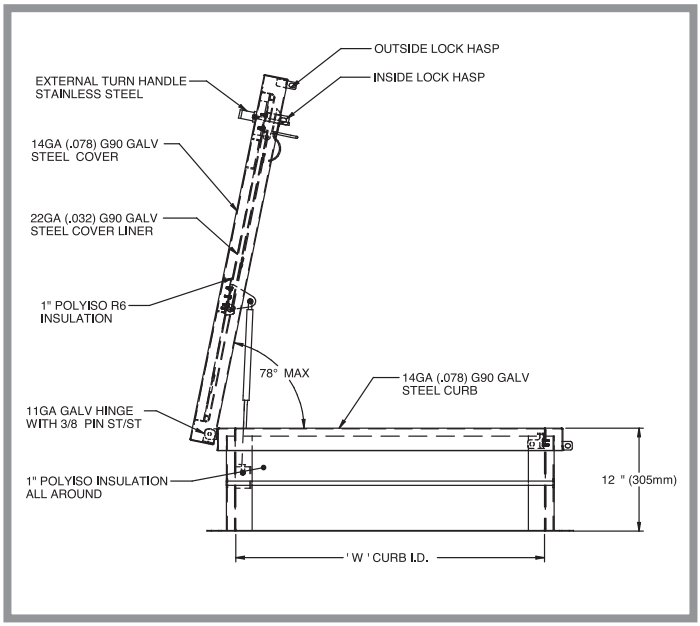

RHG STANDARD SIZES *(other sizes available)*

Model	Curb ID W&L inches (mm)	Weight per Hatch lbs. (kg.)
G3232	24 x 24 (610 x 610)	125 (56.8)
G3238	24 x 30 (610 x 762)	130 (58.9)
G3244	24 X 36 (610 X 914)	135 (61.4)
G3838	30 x 30 (762 x 762)	145 (65.8)
G3844	30 x 36 (762 x 914)	155 (70.5)
G4444	36 x 36 (914 x 914)	170 (77.3)

For detailed specifications see submittal sheet

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.