RHG GALVANIZED
SERVICE STAIR ACCESS ROOF HATCH



Application
Acudor Service Stair Roof Hatches are designed to provide convenient, economical access to the roof of a building from a full size staircase to perform maintenance.

Features RHG
- Weather tight construction
- Convenient one-hand operation
- 12" high insulated curb
- Supports 40lbs./sq. ft. live load
- G90 Galv. Steel
- Stainless Steel Hardware

Optional Features RHG
- Stainless Steel cover, curb
- Curb Mounted Units
- Curb pitch corrected for sloped roof
- Higher curb heights for "green roof" applications
- Louvered Curbs
- Polycarbonate domes for daylighting

RHG Specifications:
Cover: Double-skin construction ("in box type design") with 1" Polyiso (R-6) insulation and a continuous EPDM foam weather/draft seal gasket that is attached to the inside of cover to provide a flush, tight fit. Designed to support a live load of 40lbs./sq. ft., the cover is 14 gauge galvanized steel with a 20 gauge aluminum inside liner.


Curb: 14 gauge galvanized steel with 1" thick Polyiso (R-6) insulation with Fiberglass liner at curb exterior. Curb is 12" high, with 3.375" wide bottom flange and pre-drilled mounting holes.

Hinge: Heavy duty galvanized steel pintle hinges with 3/8" SS pin.

Opening: Gas spring operators allow cover to open and close with ease. Stainless Steel inside pull handle allows for easy control when closing cover.

Door Latch: Self latching, Stainless Steel outside T handle with inside lock and lever assembly. Unit also has inside and outside padlock provisions.

Finish: Material is prepared with an iron phosphate wash, followed by a rust inhibiting primer, and then a baked on polyester enamel grey paint.

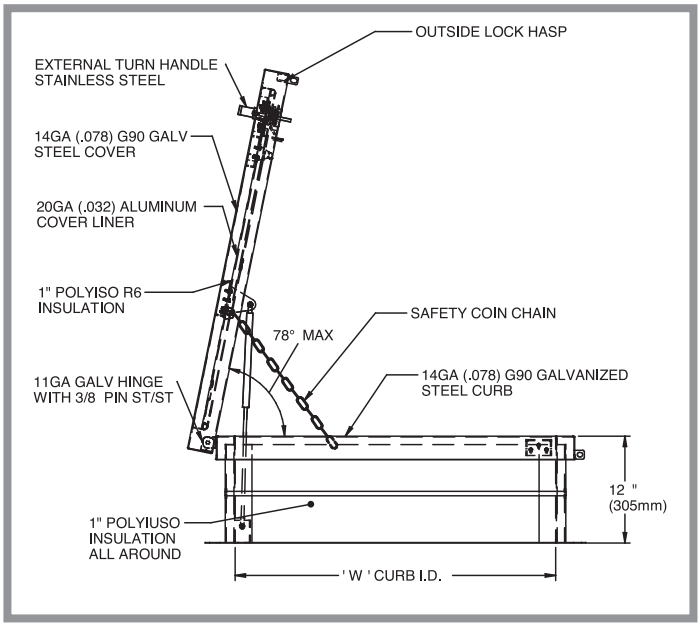

RHG STANDARD SIZES *(other sizes available)*

	Curb ID W&L	Weight per Hatch
Model	**inches (mm)**	**lbs. (kg.)**
G38104	30 x 96 (762 x 2438)	335 (152.3)

For detailed specifications see submittal sheet

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.