TD-5025...

Specialty Access Door,

Recessed Access Door for Tile and Marble





Application


- This recessed access door is ideal for use on tiled and marbled walls
- Door accepts tiles/marbles with grout gaps, harmoniously blending with surroundings
- Installed door remains invisible ensuring architecturally pleasing appearance

Product Features

- Zinc coated steel provides superior corrosion resistance
- Concealed heavy duty hinge
- Recessed door accepts Tiles and Marbles of varied thicknesses
- Concealed Latch

TD-5025 Access Door Specifications:

Material: 16 Ga Satin Coat Steel.
Door: 16 Ga, 3/4" recessed tray to accept 5/8" MDF and glue by others.
Frame: 16 Ga, press bent for strength and rigidity.
Hinge: Continuous concealed piano hinge.
Standard Lock: Cam Latch.
Optional Lock: Touch Latch, Magnetic Lock.
Finish: Powder coated RAL 9016.

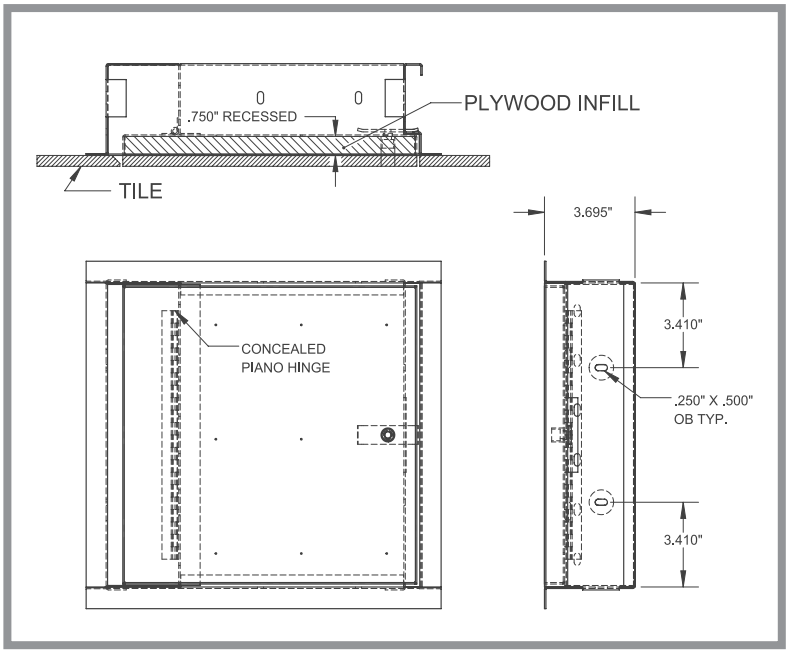

TD-5025 STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Latches	Weight per Door	
Inches	mm		lbs.	kg.
12 X 12	300 X 300	1.0	10.0	4.5
14 X 14	350 X 350	1.0	13.0	5.9
16 X 16	400 X 400	1.0	15.0	6.8
18 X 18	450 X 450	1.0	18.0	8.2
24 X 24	610 X 610	1.0	25.0	11.3
24 X 36	610 X 914	2.0	34.0	15.4

For detailed specifications see submittal sheet

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.