
SVA Aluminum

UL Listed Smoke Vent, Double Leaf

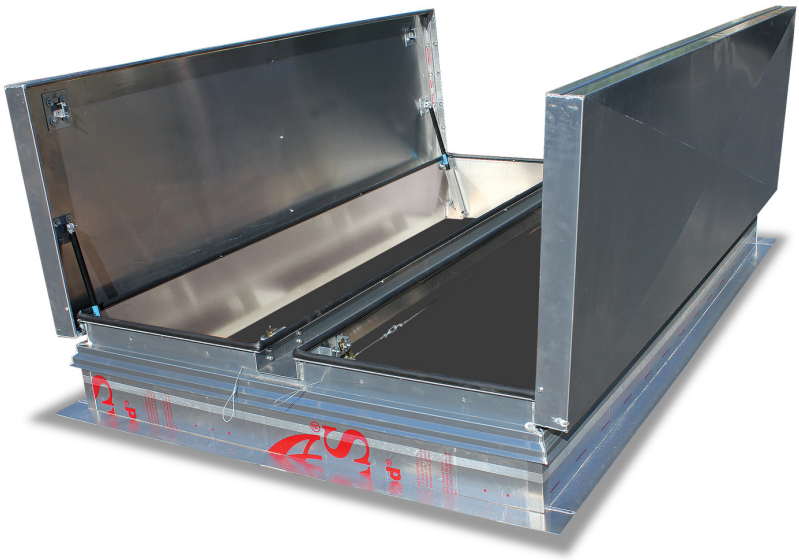

Application

Acudor Smoke Vents are designed to provide an economical solution for fire ventilation. These UL-Listed, automatic Smoke Vents provide invaluable assistance to firefighters by evacuating deadly smoke, heat, and gases from a burning building

Features SVA

- 1/8" Aluminum
- High performance gas springs
- UL Listed Fusible or McCabe Resettable Links
- 12" high insulated curb
- Inside and Outside manual release

Optional Features SVA

- Curb mount or Metal Building Flange
- Double-Dome Co-Polyester lids for daylighting
- Louvered curb for ventilation

SVA Specifications:

Cover: Double-skin construction ("in box type design") with 1" cellulose insulation and a continuous EPDM foam weather/draft seal gasket that is attached to the inside of cover to provide a flush, tight fit. Designed to support a live load of 40lbs./sq. ft., the cover is 11 gauge aluminum with a 20 gauge aluminum inside liner.

Curb: 1/8" Aluminum with 1" thick fiberboard roof insulation at curb exterior. Curb is 12" high, with 3.375" wide bottom flange and pre-drilled mounting holes.

Hinge: Heavy duty galvanized steel / aluminum pintle hinges with 3/8" pin.

Opening: Gas spring operators allow cover to open and close with ease. Inside and outside release allows for manual lid operation.


Door Latch: Self latching Slam Latch. Supplied standard with 165° UL Listed Fusible Link. Resettable McCabe link available.

Finish: Aluminum: Mill Finish.

SVA STANDARD SIZES *(other sizes available)*

Model	Curb ID W&L inches (mm)	Weight per Hatch lbs. (kg.)
SVA4848	48 x 48 (1219 x 1219)	105 (48)
SVA4872	48 x 72 (1219 x 1829)	130 (59)
SVA4890	48 x 90 (1219 x 2286)	135 (61)
SVA4896	48 x 96 (1219 x 2438)	140 (64)
SVA6060	60 x 60 (1524 x 1524)	130 (59)
SVA6072	60 x 72 (1524 x 1829)	135 (61)
SVA6090	60 x 90 (1524 x 2286)	165 (75)
SVA6096	60 x 96 (1524 x 2438)	170 (77)

For detailed specifications see submittal sheet

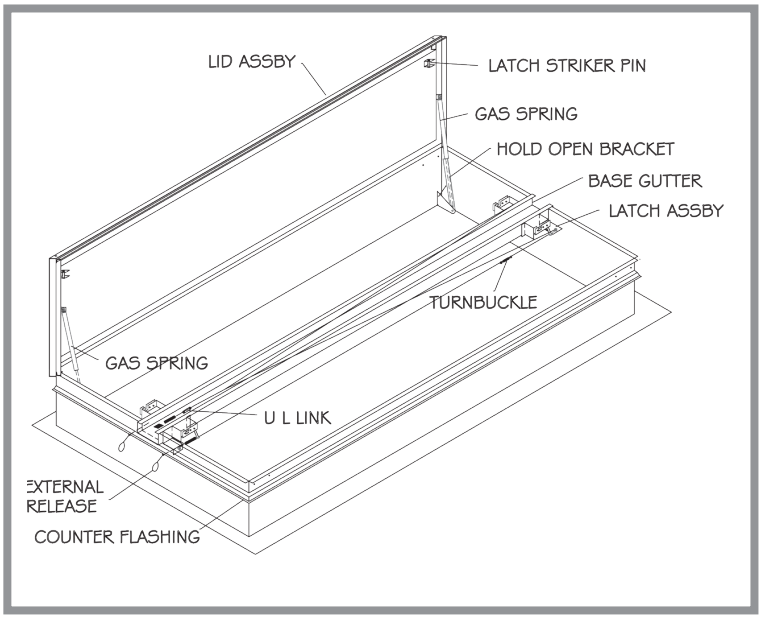

U.S.A.: info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
MEXICO: infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.