# RHG GALVANIZED
## SHIP STAIR ACCESS ROOF HATCH



### Application
Acudor Ship Stair Roof Hatches are designed to provide convenient, economical access to the roof of a building for maintenance.

### Product Features
- Weather tight construction
- 12" high insulated curb
- G90 Galv. Steel
- Convenient one-hand operation
- Supports 40lbs./sq. ft. live load
- Stainless Steel Hardware

### Optional Features RHG
- Stainless Steel cover, curb
- Louvered Curbs
- Curb pitch corrected for sloped roof
- Higher curb heights for "green roof" applications
- Polycarbonate domes for daylighting
- Curb Mounted Units

### RHG Specifications:
**Cover:** Double-skin construction ("in box type design") with 1" Polyiso (R-6) insulation and a continuous EPDM foam weather/draft seal gasket that is attached to the inside of cover to provide a flush, tight fit. Designed to support a live load of 40lbs. sq.ft., the cover is 14 gauge galvanized steel with a 22 gauge galvanized steel inside liner.


**Curb:** 14 gauge galvanized steel with 1" thick Polyiso (R-6) insulation with Fiberglass liner at curb exterior. Curb is 12" high, with 3.375" wide bottom flange and pre-drilled mounting holes.

**Hinge:** Heavy duty galvanized steel pintle hinges with 3/8" SS pin.

**Opening:** Gas spring operators allow cover to open and close with ease. Stainless Steel inside pull handle allows for easy control when closing cover.

**Door Latch:** Self latching, zinc plated outside T handle with stainless steel inside lock and lever assembly. Heavy duty detention lock with paracentric key. Unit also has inside and outside padlock provisions.

**Finish:** Material is prepared with an iron phosphate wash, followed by a rust inhibiting primer, and then a baked on polyester enamel paint.

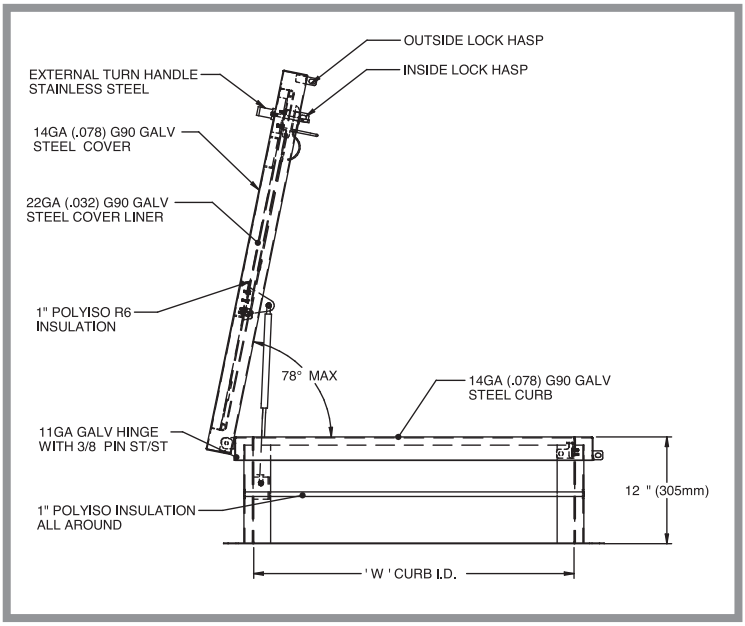


### RHG STANDARD SIZES *(other sizes available)*

| Model | Curb ID W&L inches (mm) | Weight per Hatch lbs. (kg.) |
|---|---|---|
| G3862 | 30 x 54 (762 x 1372) | 225 (102.3) |

For detailed specifications see submittal sheet

**U.S.A.:** info@acudor.com / 800-722-0501 **CANADA:** info@acudor.ca / 844-228-3671 **INTERNATIONAL:** info@acudorintl.com / 905-428-2240
**MEXICO:** infomx@acudor.com / +52-844-171-6595 **INDIA / MIDDLE EAST / NORTH AFRICA:** ap-imea@acudor.com / +971-4-399-6966 **SITE:** www.acudor.com

*This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.*